



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C09J 7/02 // B29C 47/06	A1	(11) International Publication Number: WO 93/07228 (43) International Publication Date: 15 April 1993 (15.04.93)
(21) International Application Number: PCT/US92/07277 (22) International Filing Date: 27 August 1992 (27.08.92) (30) Priority data: 07/769,548 1 October 1991 (01.10.91) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: HERRIDGE, David, B. ; KRUEGER, Dennis, L. ; ROLANDO, Richard, J. ; RAMIREZ, Ronald, J. ; SAX, James, E. ; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). BEST AVAILABLE COPY		(74) Agents: LILLY, James, V. et al.; Office of Intellectual Property Counsel, Minnesota Mining and Manufacturing Company, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). (81) Designated States: BR, CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE). Published <i>With international search report.</i>
(54) Title: COEXTRUDED PRESSURE-SENSITIVE ADHESIVE TAPE AND METHOD OF MAKING (57) Abstract A unified, composite tape structure is provided. The tape comprises two outer pressure-sensitive adhesive layers (16, 18) joined via melt processing. A method of making the tape comprising the use of melt processing is also disclosed. In the method a plurality of layers are melt processed and simultaneously joined to form the unified composite (10).		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CC	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SK	Slovak Republic
CI	Côte d'Ivoire	LK	Sri Lanka	SN	Senegal
CM	Cameroon	LU	Luxembourg	SU	Soviet Union
CS	Czechoslovakia	MC	Monaco	TD	Chad
CZ	Czech Republic	MG	Madagascar	TC	Togo
DE	Germany	ML	Mali	UA	Ukraine
DK	Denmark	MN	Mongolia	US	United States of America
ES	Spain			VN	Viet Nam
FI	Finland				

- 1 -

COEXTRUDED PRESSURE-SENSITIVE ADHESIVE TAPE
AND METHOD OF MAKING

Background of the Invention

5 Field of the Invention

The present invention relates to a composite pressure-sensitive adhesive tape and to a solventless method for making these tapes.

10 Description of the Prior Art

Composite pressure-sensitive adhesive tapes are known. Typically they comprise at least one adhesive layer adhered to another layer. This other layer may comprise a second layer of adhesive or a
15 backing layer which may itself comprise several layers of material.

Techniques for the manufacture of composite pressure-sensitive adhesive tapes are also known. One technique comprises a multistep solvent coating
20 process. Another comprises a multistep hot melt coating process. In each of these techniques the individual layers that make up the composite tape are applied sequentially. Consequently, they are time consuming and labor intensive. Solvent coating
25 processes further necessitate the use of special handling and equipment so as to minimize hazards to workers and the environment. Both processes subject the tape to severe operating conditions (for example elevated temperature, solvent atmosphere, etc.). This
30 necessitates the use of non-extensible, tear-resistant, heat-resistant and/or water resistant backing materials so as to withstand the rigors of the manufacturing process. However, this also limits the use of polymeric materials as the backing material to those
35 that are oriented and/or are sufficiently thick to withstand the rigors of the manufacturing process.

- 2 -

An attempt to reduce the number of steps in the process involves the use of coextrusion. Such techniques are described in a number of publications. For example, U.S. Patent 3,415,920 discloses the
5 manufacture of a polyolefin encapsulated adhesive fiber by the coextrusion of an adhesive and an outer skin of polyolefin.

Japanese patent publication JP-46-21120 discloses a process for the melt extrusion of a stream
10 of thermoplastic synthetic resin and a stream of an adhesive, guiding the two streams of resin through a single die to form a single fluid flow having separate layers made up of each stream, and forming a tape having adhesive on one side.

15 U.S. Patent 3,823,211 discloses a method of coextruding an adhesive/backing construction in the form of a tubular film and a method of forming a bubble of the backing material followed by coating an adhesive on the inside surface of the bubble of the backing
20 material. Both techniques result in tape having adhesive on one side.

U.S. Patent 4,214,261 discloses a multilayer polypropylene film which can be prepared by co-extrusion. It further discloses that an adhesive can
25 be subsequently coated onto the multilayer film.

U.S. Patent 4,379,806 discloses producing a two-layer pressure-sensitive adhesive tape. In one process a tacky, thermoplastic rubber/resin pressure-sensitive adhesive and a backing of a normally non-
30 tacky thermoplastic resin are coextruded to provide a tape having adhesive on only one side. In another method a blown layered film of the backing and adhesive is extruded. The film is then collapsed so that the backing film is joined to itself. The adhesive and the
35 backing each have a torque value of between about 100 meter grams and 1000 meter grams when worked at 74 rpm at 420°F in a Brabender torque dynamometer.

- 3 -

Additionally, the adhesive is joined to the backing "through an intermediate interlocking layer formed by controlled penetration of components during coextrusion of the film-forming and the adhesive compositions"

5 (Col. 2, lines 3-7).

U.S. Patent 4,888,075 discloses an all plastic multilayer liner and facestock for pressure-sensitive labels, tapes, etc. and a method of making such liners and facestocks. The liner/facestock is
10 coextruded from any suitable coextrusion die such as, for example, a Cloeren "vane" die (Col. 2, lines 56-61). The pressure-sensitive adhesive is subsequently applied to the liner/facestock either by adhesive transfer from a release liner (Col. 6, lines 14-22), or
15 in a subsequent coating step (Col. 6, lines 23-29 and Fig. 3A).

European Patent Application Publication No. 0 411 820 A1 discloses a reinforced pressure-sensitive adhesive tape and a method of making the same. The
20 tape comprises a backing having a plurality of ribs at least partially embedded in one of its major surfaces. A pressure-sensitive adhesive is provided on at least one surface of the backing. The backing and reinforcing ribs can be coextruded together followed by
25 application of the adhesive.

There have also been attempts to coextrude multilayer two-sided adhesive tapes directly into a nip formed between two solid surfaces. This technique has not been entirely satisfactory as the pressure on the
30 extrudate while it is in the nip causes the adhesive to aggressively adhere to one of the surfaces. Once adhered, it is difficult to remove the adhesive.

While the tapes of these prior efforts are useful, their manufacture and conversion into an
35 adhesive tape generally involves a series of sequential operations or extra handling which add to the cost and complexity of their preparation. The tapes disclosed

- 4 -

in the above-mentioned publications have adhesive on only one side. To the extent that they disclose a tape having adhesive on both sides, they do so only through a multi-step process, rather than one in which the entire tape is produced via a single melt processing step.

Summary of the Invention

The present invention provides a composite, unified pressure-sensitive adhesive tape. The composite structure has two opposed, exterior surfaces of a normally tacky pressure-sensitive adhesive. The tape of the invention is sometimes referred to herein as a "double sided" tape to indicate the presence of adhesive on both surfaces.

In one embodiment of the invention, the unified structure comprises first and second simultaneously melt processed pressure-sensitive adhesive layers. These layers are joined in the molten state and the resulting structure is cooled.

In another embodiment of the invention, the tape comprises the first and second pressure-sensitive adhesive having a thin (e.g., 15 micron thick or less) carrier layer between them. These layers are simultaneously joined together by melt processing.

In still another embodiment of the invention, the tape comprises a simultaneously melt processed construction comprising two outer pressure-sensitive adhesive layers and an internal layer that may be a foamed layer, a blend of polymers, a discontinuous layer or a series of two or more layers. In yet another embodiment of the invention, the tape comprises the first and second pressure-sensitive adhesive layers having a thick (e.g. greater than 15 micron) carrier between them. These layers are simultaneously joined together by melt processing and the resulting structure is cooled before it passes through a nip.

- 5 -

The tape of the invention is provided by melt processing at least two molten streams of pressure-sensitive adhesive composition, simultaneously joining them together, and depositing the joined streams onto one face of a support surface and cooling the streams to form the composite tape. In a novel process, the molten streams are simultaneously melt processed and deposited on a support surface without passing the molten composite through a nip. Thus one surface of the molten composite contacts the support while the other is free, that is it does not contact another solid surface. In this embodiment of the invention, the adhesion problems due to nipping the molten structure are avoided. Preferably the support surface employed in this novel process comprises a release liner. In this case, the opposite face of the support surface may then be contacted with a cooling means maintained at a temperature less than the melt temperature of the composite structure. The tape is preferably cooled after which it may be, nipped, wound upon itself, and cut to any desired width and/or length.

Optionally, one or more additional molten streams can be provided with and simultaneously joined between the molten streams of adhesive.

The composite tape of the invention can be provided as a construction free from any backing and/or carrier layer. Alternatively, it can be provided as a construction having a carrier layer. Because the carrier layer is simultaneously melt processed during the manufacture of the composite tape, it is not limited to any particular thickness. Thus, it can be a very thin layer (e.g., 1 micrometer or less) if so desired.

The present invention offers several unique features. For example,

- 6 -

- 5 - It provides a tape free from paper, non-woven, or fabric backings thereby eliminating the need to purchase and maintain an inventory of various web-like backings.
- 10 - It provides a composite, unified tape having pressure-sensitive adhesive on both sides wherein the adhesive layers have been simultaneously joined via melt processing.
- 15 - It allows one to provide a composite, unified double sided tape having any desired carrier between the adhesive layers.
- 20 - It allows one to readily produce a tape having desired properties (e.g. hand tearability or dispensibility) by simply varying the nature and quantity of the components employed, and/or the process conditions employed.
- 25 - It provides a single step, solvent-free manufacturing process thereby eliminating the various handling, processing and solvent recovery steps encountered with the multi-step processes described above.
- 30 - It provides an integrated process in which raw materials are charged at one end and a finished product is obtained at the other end.

Brief Description of the Drawings

35 Figs. 1 A-E show a cross section of various embodiments of the tape of the invention.

 Fig. 2 shows a schematic diagram of a system used to manufacture the tape invention.

- 7 -

Detailed Description

The tape of the invention comprises at least two adhesive layers simultaneously joined together to form a unified composite structure by melt processing.

As used herein, melt processing means the pumping and shaping of molten material into a structure. One melt processing technique useful in this invention is coextrusion. In the context of this specification, coextrusion means the simultaneous melt processing of multiple molten streams and the combination of such molten streams into a single unified structure, preferably from a single extrusion die. When a single die is used, the streams of molten material are not required to exit the die from a single outlet. The molten streams can be joined together in a feedblock, in the die, or outside the die. If the streams are joined in the die, they can come together upstream of the exit orifice (a common land die) or at the exit orifice (a zero common land die). In all cases, however, the streams are joined or combined together in proximity to the outlet of the die.

The tape of the invention can be provided in several embodiments. For example, it can comprise two layers of a pressure-sensitive adhesive. Such an embodiment is shown in Fig. 1A wherein reference number 10 indicates the tape as a whole, and reference numerals 12 and 14 represent first and second exposed adhesive surfaces of first and second layers of pressure-sensitive adhesive 16 and 18 respectively.

Fig. 1B represents another embodiment of the invention in which tape 20 comprises layers of 16 and 18 pressure-sensitive adhesive separated by carrier layer 19.

Fig. 1C represents an embodiment of the invention in which tape 30 comprises layer carrier layer 19, layers 15 or 17 of a second adhesive and

- 8 -

layers 16 and 18 of the first pressure-sensitive adhesive.

Fig. 1D illustrates an embodiment of the invention in which tape 40 has intermediate layers 11 and 13 respectively interposed between carrier 19 and adhesive 16 and between carrier 19 and adhesive 18.

Fig. 1E shows an embodiment of the invention in which a discontinuous material is provided as the carrier layer. In this embodiment, tape 50 comprises a series of longitudinally disposed ribs or strands 51 surrounded by simultaneously extruded pressure-sensitive adhesive layers 16 and 18.

In each of these embodiments, the various layers are simultaneously melt processed. Additionally in each embodiment, each adhesive utilized may be the same as, or different than, the other(s). When the same adhesive is employed, the tape has a homogeneous composition and may appear to be a single layer construction. However, the presence of two layers of adhesive may also be observed. In all of the embodiments shown in the Figs., the use of a common adhesive as the adhesive layers results in a tape having essentially the same tack and adhesion properties on both of surfaces 12 and 14. If, however, a tape which has differential tack and/or adhesion is desired, different adhesive materials may be employed.

It is noted that the tape of the invention can employ a plurality of adjoining adhesive layers such as is shown by layers 15/16 and 17/18 in Fig. 1C. This construction permits flexibility in the design and construction of the tape and allows one to provide a tape having, for example, a high tack surface over a high shear adhesive. While this discussion has been made with reference to the adhesive tape of Fig. 1C, it is understood that any embodiment of the invention may employ multiple adhesive layers. It is further

- 9 -

understood that the carrier layer of the various embodiments may also be provided as multiple layers.

It should also be noted that any of the layers of the tape of the invention can be of the same or different thickness as the other layers. Thus for example, layers 16 and 18 can either be of equal thickness as shown in Fig. 1A, or they can be of different thickness. While the precise thickness of these layers is not crucial to the invention, they are commonly at least 1 micrometer thick.

Pressure-sensitive adhesives useful in the invention include normally tacky, pressure-sensitive adhesives known in the art. Such adhesives may be foamed adhesives if desired. The adhesives useful herein are extrudable and typically, though not necessarily, amorphous. Furthermore, the preferred adhesives are normally tacky (at room temperature) pressure-sensitive adhesives.

Useful pressure-sensitive adhesive compositions are fluid or pumpable at the temperatures used to melt process the tape (e.g., 90°C-300°C). Furthermore these adhesive compositions preferably do not significantly degrade or gel at the temperatures employed during melt processing. Useful adhesive compositions also typically have a melt viscosity of from 1 centipoise (cps) to 1,000,000 poise. As used herein, the term melt viscosity means the viscosity of the molten material at the processing temperature employed.

The adhesives may generally be classified into the following categories:

- Random Copolymer adhesives such as those based upon acrylate and/or methacrylate copolymers, α -olefin copolymers, silicone copolymers, chloroprene/acrylonitrile copolymers, and the like.

- 10 -

- Block Copolymer adhesives including those based upon linear block copolymers (i.e., A-B and A-B-A type), star block copolymers, comb block copolymers, and the like.
- Natural rubber adhesives.

A description of useful pressure-sensitive adhesives may be found in Encyclopedia of Polymer Science and Engineering, Vol. 13, Wiley-Interscience Publishers (New York, 1988). Additional description of useful pressure-sensitive adhesives may be found in Encyclopedia of Polymer Science and Technology, Vol. 1, Interscience Publishers (New York, 1964).

Other pressure-sensitive adhesives useful in the invention are described in the patent literature. Examples of these patents include Re 24,906 (Ulrich), U.S. 3,389,827 (Abere et al at Col. 4-Col. 5), U.S. 4,080,348 (Korpman), U.S. 4,136,071 (Korpman), U.S. 4,792,584 (Shiraki et al), U.S. 4,883,179 (Young et al), and U.S. 4,952,650 (Young et al).

Commercially available pressure-sensitive adhesives are also useful in the invention. Examples of these adhesives include the hot melt pressure-sensitive adhesives available from H. B. Fuller Company, St. Paul, Minnesota as HM-1597, HL-2207-X, HL-2115X, HL-2193-X. Other useful commercially available pressure-sensitive adhesives include those available from Century Adhesives Corporation, Columbus, Ohio.

Carrier layers useful in the present invention comprise extrudable polymeric materials. Useful carrier materials are fluid or pumpable at the temperatures used to melt process the tape; they do not significantly degrade at such temperatures; and they have a melt viscosity in the range of from 1 cps to 1,000,000 poise.

- 11 -

Inorganic materials may be employed in the carrier and/or in the adhesive layer. Examples of useful inorganic materials include calcium carbonate, titanium dioxide, glass beads or bubbles, polymeric
5 beads or bubbles, metals particles, flame retardants, fibers, pigments, etc.

The carrier may be provided either as a continuous or a discontinuous layer. And, like the adhesive layers, it may be either a very thin layer (or
10 small rib) (e.g., 1 micrometer) or a thick layer (or large rib) (e.g., 500 micrometers).

Numerous organic materials are useful as the carrier layer. Examples of these materials include polyolefins (including by way of example linear low
15 density polyethylene, ultra low density polyethylene, low, medium, and high density polyethylene, polypropylene, foamed polyolefins, copolymers of polypropylene and ethylene, and blends of polyolefins (including polypropylene/polyethylene blends and
20 polypropylene/polystyrene blends)), polyurethanes, foamed polyurethanes, polystyrene and foamed polystyrene, vinyl materials (including by way of example ethylene vinyl acetate, polyvinylidene dichloride, polyvinylchloride), polyesters, polymethyl
25 methacrylate, and block copolymers (including by way of example A-B and A-B-A block copolymers). Blends and mixtures of these materials may also be utilized as the carrier layer.

The tape of the invention may also
30 incorporate one or more intermediate layers between the carrier layer and the adhesive layer(s). The intermediate layer may comprise one of the materials useful as the carrier layer. Typically it is thinner than the carrier layer, although there is no absolute
35 requirement that it be so. Thus, the intermediate layer may have a thickness in the range of from 1 to 500 micrometers, typically from 1 to 5 micrometers.

- 12 -

These materials must meet the same melt processing criteria as the carrier layer materials to be useful herein.

One class of useful intermediate layer materials comprises a copolymer of the intermediate layer material and the carrier layer material.

Specific examples of materials useful as the intermediate layer include ethylene/vinyl acetate copolymer (preferably containing at least about 10% by weight vinyl acetate units), carboxylated ethylene/vinyl acetate copolymer such as "CXA" 3101 available from DuPont, copolymers of ethylene and methyl acrylate such as "poly-Eth" 2205 EMA available from Gulf Oil and Chemicals Co., ethylene/acrylic acid copolymer available from Dow Chemical Company, "Surlyn" (a copolymer of ethylene with a methyl acrylate) available from DuPont, maleic anhydride modified polyolefins and copolymers of polyolefins such as the "Modic" resins available from Mitsubishi Chemical Company, polyolefins containing homogeneously dispersed vinyl polymers such as the "VMX" resins available from Mitsubishi Chemical Company (such as FN-70, an ethylene/vinyl acetate based product having a total vinyl acetate content of 50% and JN-70, an ethylene/vinyl acetate based product containing dispersed polymethylmethacrylate and having a vinyl acetate content of 23% and a methyl methacrylate content of 23%), "Polybond" (believed to be polyolefin grafted with acrylic acid) available from B. P. Chemicals Inc., "Plexar" (believed to be a polyolefin grafted with polar functional groups) available from Quantum Chemicals, Inc., a copolymer of ethylene and acrylic acid such as "Primacor" available from Dow Chemical Company, and a copolymer of ethylene and methacrylic acid such as "Nucrel" available from DuPont. If desired, the intermediate layer materials may be employed to form the carrier layer.

- 13 -

Preferably the ratio of the melt viscosity of any material used as a layer herein to the melt viscosity of any other material used as a layer herein is in the range of from 10:1 to 1:10, more preferably in the range of 3:1 to 1:3 and most preferably in the range of 2:1 to 1:2. It has been found that as the ratio of the melt viscosity changes from a ratio of 1:1, the lower viscosity material has a tendency to migrate to the high shear portion of the extrusion die and create an area rich in that material.

If desired a low adhesion backsize (LAB) can be melt processed into or onto one or both of surfaces 12 and 14. the resulting construction will still exhibit pressure-sensitive properties although they may be somewhat less than if no LAB were employed. In order to be melt processable, however, the LAB must be extrudable under the conditions employed during manufacture of the tape. It is also, possible, however, to apply the LAB via conventional coating techniques after the tape has been coextruded. LAB materials useful herein include polyolefins, cured silicones, polymethyl pentene, poly 1-octene, blends of silicones with polyethylene, blends of fluorochemicals with polypropylene, polyethylene, polyurethanes, or fluorochemicals grafted to polyolefins or similar polymers and the like.

LAB materials are described in the literature. See for example, U.S. Patent Nos. 2,532,011; 2,607,711; and 3,318,852.

The tape of the invention may be made by a melt processing technique in which at least two molten streams of a pressure-sensitive adhesive composition and, optionally, streams of other melt processable materials are combined together, preferably in proximity to the outlet of an extrusion die, so as to form a unified structure. Molten streams of other materials may also be advantageously combined with the

- 14 -

adhesive streams in the practice of the invention. In a novel of the melt processing technique, the tape is made by:

- 5 a) providing at least two molten streams of a first and second pressure-sensitive adhesive composition;
- b) combining said molten streams into a single unified, molten structure having first and second outer surfaces;
- 10 c) depositing said unified, molten structure onto a solid substrate, and
- d) cooling said molten structure before the structure passes through a nip.

Preferably, the tape is manufactured using a
15 coextrusion technique in which the various molten streams are transported to an extrusion die outlet and joined together in the proximity of said outlet. A coextrusion technique useful in the invention is schematically shown in Fig. 2. With reference to Fig.
20 2, extruders 100, 110, and 120 are shown. Extruders 100 and 110 provide molten streams of 102 and 112 of the first and second pressure-sensitive adhesive composition to a feedblock 130. Extruder 120 provides a molten stream of a third material, such as a carrier
25 material 122, to feedblock 130. It is of course understood that if no third material is desired, there is no need to utilize extruder 120. It is further understood that only one extruder is needed to deliver the pressure sensitive adhesive composition to the
30 feedblock. In the event that only one extruder is employed, the melt stream is split into the number of streams (e.g. two or more) of the adhesive to be utilized in the tape.

Feedblock 130 combines the molten streams
35 into a single flow channel. The distinct layers of each material are maintained at this time because of the laminar flow characteristics of the streams. The

- 15 -

feedblock delivers or transports the now unified, molten structure to the extrusion die 140 where it is reduced in height and increased in width so as to provide a relatively thin and wide construction.

5 The extruders 100, 110 and 120 are in effect "pumps" for delivery of the molten streams to the extrusion die. The precise extruder employed is not critical to the process. However, it is understood that the design of the extruder screw will influence
10 the ability of the extruder to provide good melt quality, temperature uniformity, throughput and the like. A number of useful extruders are known and include single and twin screw extruders, batch-off extruders and the like. These extruders are available
15 from a variety of vendors including Davis-Standard Extruders, Inc. (Pawcatuck, CT), Black Clawson Co. (Fulton, NY), Berstorff Corp (NC), Farrel Corp. (CT), MoriYama Mfg. Works, Ltd. (Osaka, Japan).

Other "pumps" may also be employed to deliver
20 the molten streams to the extrusion die. They include drum unloaders, bulk melters, gear pumps, etc. These are available from a variety of vendors, including Graco LTI (Monterey, CA), Nordson (Westlake, CA), Industrial Machine Manufacturing (Richmond, VA), Zenith
25 Pumps Div., Parker Hannifin Corp., (NC).

Once the molten streams have exited the pump, they are typically transported to the die through transfer tubing and/or hoses. It is preferable to minimize the amount of residence time in the tubing so
30 as to avoid problems of, for example, melt temperature variations. This can be accomplished by a variety of techniques, including minimizing the length of the tubing, providing appropriate temperature control of the tubing, and utilizing static mixers in the tubing
35 to maintain a homogeneous temperature in the tubing.

The use of a feedblock is optional as a variety of coextrusion die systems are known. Thus,

- 16 -

for example, multimanifold dies may also be employed. Examples of feedblocks and extrusion dies useful in the invention are the Cloeren "Vane" dies and Cloeren coextrusion feedblocks and multimanifold dies available
5 commercially from The Cloeren Company of Orange, Texas. Such dies are described in, for example, U.S. Patent Nos. 4,152,387; 4,197,069; 4,600,550; 4,619,802; 4,780,258; and 4,789,513. Other coextrusion dies and feedblocks are available from Extrusion Dies Inc.
10 (Chippewa Falls, WI), ER-WE-PA (GA), Egan Machinery Division, John Brown Inc. (NJ), and Welex Inc. (PA).

The selection of the feedblock and/or extrusion die to be utilized is not critical to the practice of the process. However, it is noted that
15 certain factors do influence the performance of the extrusion process. For example, because feedblocks require materials to flow in contact through a single manifold after the point of confluence, the relative viscosities of the materials and their ability to be
20 processed at a single manifold temperature must be considered. When the relative viscosities of the materials exceed 4:1 or when a single manifold temperature cannot be tolerated by the materials, multimanifold dies are typically employed. In multi-
25 manifold dies, each material flows in its own manifold to the point of confluence. Each individual manifold can be designed specifically for the rheology of each resin. Also each manifold can be controlled at a different process temperature.

30 Multimanifold dies can also be designed with zero common land length so that the materials do not meet until the die lip or exit orifice. Alternatively they can be designed with a short common flow channel. A zero common land would be preferred when molten
35 streams with extreme viscosity differences (e.g., ratio of 400:1 +) are employed. For more moderate viscosity differences (e.g., ratio of 10:1 or less), a short

- 17 -

common land can be beneficial because the period of high temperature and high pressure while the melts are in the common land can improve the bond strength between the layers of the composite tape. The
5 extrusion die 140 deposits the unified, molten structure onto a solid substrate (here indicated as a release liner 150) supplied from a roll 151 so that the first surface of the structure is in contact with the liner (a solid substrate) while the second surface of
10 the structure is a free surface (i.e., it is not in contact with any other solid surface). Tape 141 results. The liner 150 contacts the surface of a casting wheel 160 and is interposed between the surface of the casting wheel and the molten stream. However,
15 the use of liner 150 in the process is optional. Thus, the molten structure can be deposited directly onto the surface of casting wheel 160. The liner can be subsequently applied to one surface of the tape of the invention later in the process, for example at nip roll
20 170.

The casting wheel is typically maintained at a temperature less than the temperature of the unified molten structure. Typically this is a temperature in the range of from 5 to 150°C (preferably from 30-
25 105°C).

When a tape such as that illustrated in Fig. 1B is made, the adhesive layers 16 and 18 blanket carrier layer 19. This enables one to make a tape with a carrier which has a tailored thermal history and,
30 accordingly, various physical properties as a result of that thermal history. Applicants are unaware of any other tape or method of making the same which provides this feature.

It has been found that for certain carrier
35 layer materials, such as polypropylene, cooling and solidifying the molten structure slowly results in an embrittled carrier layer. Tapes made in this manner

- 18 -

are hand tearable. If, however, the unified molten structure is cooled and solidified rapidly, a more ductile carrier layer results. Tapes made in this manner have high elongation at break and stretch
5 significantly when hand torn.

An air knife 165 may be used to force the molten unified structure against the liner 150 if desired.

The unified structure is then "nipped"
10 between casting wheel 160 and nip roll 170. If desired, the unified structure can then pass through a series of rolls 171, 172, 173 and then can be wound as roll 180. Alternatively, the tape can be removed from the liner and wound upon itself as roll 180. The liner
15 can be recovered and reused if desired. Desired widths and/or lengths of the tape can then be cut using techniques known to the art.

A number of additional steps can optionally be performed if desired. Thus, for example, the tape
20 may be uniaxially or biaxially oriented, it can be post cured (such as through heat, electromagnetic radiation, etc.), or it can be dusted with various tack-reducing agents. Furthermore, LAB coatings can also be applied at this point.

25 The present invention is further described with reference to the following non-limiting examples. In these examples, the following properties were tested according to the following test methods:

TEST METHODS

30 The tapes described in this invention were characterized by the following test methods:

ASTM-D3330 for tape peel adhesion to stainless steel (SS) and polypropylene (PP) (90° and 180° peel angles) and for tape liner
35 release.

ASTM-D3654 for shear failure of a 2.54 cm by 2.54 cm (1" x 1") sample

- 19 -

both at room temperature and at elevated temperatures.

ASTM-D412 for tensile elongation at break.

5

EXAMPLE 1

A coextruded pressure-sensitive adhesive tape according to the invention was prepared using a single manifold extrusion die coupled to a three layer
10 coextrusion feedblock. The die was an Ultraflex™ 40 model fabricated by Extrusion Dies Incorporated (Chippewa Falls, WI). Its internal flow channel was comprised of a inlet channel, a primary manifold, a secondary manifold, and a final land. The die had a
15 manually adjusted flexible lip and two independently controlled temperature zones, one in each die half. The die orifice was 25.4 cm (10 in.) wide and was cut to a height of 0.1016 cm (0.040 in.). The inlet channel of the die was designed to accept the output of
20 the feedblock which was bolted to the die. The feedblock was fabricated by Cloeren Company (Orange, TX). It included three inlet ports, a selector plug, three manifolds, two adjustable vanes between the manifolds, and two distribution pins. This feedblock
25 had two independently controlled temperature zones. For this example, an ABA selector plug was used so that the outer two feedblock manifolds were fed with the same polymer from the same extruder. The adjustable vanes were located to divide the total cross sectional
30 area into thirds. No profile was cut into the distribution pins.

Fitted to the "A" inlet of the feedblock was a transfer tube from a hot-melt acrylate extrusion processing apparatus. This was comprised of a Bonnot
35 batch-off extruder joined in cascade to a 5.08 cm (2 in.) diameter single screw extruder (available from Berlyn Corp., Worcester, MA) through an inlet port at

- 20 -

zone No. 3 of this extruder. This extruder was electrically heated and water cooled. At the head of this extruder, a Berlyn screen pack and a Nichols Zenith PEP gear pump (available from Parker Hannifin Corp., Waltham, MA) was employed.

Fitted to the "B" inlet of the feedblock was a transfer tube from a 3.175 cm (1.25 in.) diameter single screw extruder (available from Killion Extruders, Inc., Cedar Grove, NJ) for processing the carrier resin. This extruder used a single stage, single flight, 3:1 compression ratio screw to process the polypropylene resin used in this example. This extruder barrel was electrically heated and air cooled.

The above extrusion apparatus was operated at the following temperatures and speeds:

Die temperature, Zone 1 = 166°C (330°F)
Die temperature, Zone 2 = 166°C (330°F)
Feedblock temperature, Zone 1 = 166°C (330°F)
Feedblock temperature, Zone 2 = 166°C (330°F)
PSA extruder, Zone 3-7 temp. = 166°C (330°F)
Gear pump temperature = 166°C (330°F)
PSA transfer tube temperature = 166°C (330°F)
Carrier extruder, Zone 1 temperature = 138°C (280°F)
Carrier extruder, Zone 2 temperature = 216°C (420°F)
Carrier extruder, Zone 3 temperature = 249°C (480°F)
Carrier transfer tube temperature = 249°C (480°F)
Bonnot speed setting = 5
PSA extruder screw speed = 38 RPM
Gear pump speed = 33 RPM
Carrier extruder screw speed = 42 RPM

The feedblock/single manifold die was mounted in an approximately horizontal attitude with the die orifice within 1.0 cm (0.4 in.) of the surface of a casting wheel (Roll A). A silicone coated paper liner

- 21 -

was unwound onto Roll A so as to make contact with the roll surface approximately one quarter of the roll circumference before the die orifice. As the liner moved past the orifice, being driven by Roll A, the composite melt was laid onto the liner. This step was aided by the impingement of air from an air knife (available from Marshall and Williams Co., Providence, RI) to minimize the entrapment of air between the melt and the incoming liner. The temperature of Roll A was controlled by circulating water through the roll's interior. This temperature control allows the process to effect the final product properties by quenching or slow cooling the composite tape. Roll A was 30.5 cm (12 in.) in diameter and was covered with 0.635 cm (0.25 in.) of silicone rubber.

The nip roll (Roll B) acted as a nip on the web to isolate the web tension from subsequent web handling steps. Roll B was 15.2 cm (6 in.) in diameter and was covered with a No. 924 plasma coating (available from Plasma Coatings Incorporated, Waterbury CT). Roll B was also temperature controlled by circulating water through its interior.

After removal from Roll B, the web edges were trimmed and the liner and tape were wound onto themselves around a core using a center driven winder.

The web handling apparatus in Example 1 was operated at the following temperatures and speeds:

Roll A temperature = 104°C (220°F)
Roll B temperature = 38°C (100°F)
Web line speed = 12.2 meters per minute (40 feet per minute FPM)

The finished tape in Example 1 is described below. The acrylate pressure-sensitive adhesive was prepared as described in Example 5 of Re 24,906:

35 Faceside Adhesive Composition-

Acrylate pressure-sensitive adhesive
Carrier Composition-

- 22 -

Polypropylene Exxon Escorene™ 3014 (12 melt
flow rate (MFR))

Backside Adhesive Composition-

Acrylate pressure-sensitive adhesive

5 Faceside Adhesive Thickness - 0.038 mm (1.5 mils)
Carrier Thickness - 0.025 mm (1.0 mil)
Backside Adhesive Thickness- 0.038 mm (1.5 mils)
Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

10

The finished tape had the following
properties:

180 degree Peel Adhesion to SS, faceside -
0.85 N/mm (39 oz per half inch)
15 180 degree Peel Adhesion to SS, backside -
0.74 N/mm (34 oz per half inch)
180 degree Peel Adhesion to PP, faceside -
0.70 N/mm (32 oz per half inch)
180 degree Peel Adhesion to PP, backside -
20 0.59 N/mm (26 oz per half inch)
Liner Release - 0.59 grams force/mm
Room Temp. Shear, faceside, 1000 grams - 220
minutes
Room Temp. Shear, backside, 1000 grams - 450
25 minutes
Oven Shear, 70°C (158°F), 500 grams - 18 minutes
Elongation at Break - 80%

Example 2

30 Example 1 was repeated with a second acrylate
PSA formulation at the following process control set
points:

Die temperature, Zone 1 = 177°C (350°F)
Die temperature, Zone 2 = 177°C (350°F)
35 Feedblock temperature, Zone 1 = 177°C (350°F)
Feedblock temperature, Zone 2 = 177°C (350°F)

- 23 -

PSA extruder, Zone 3-7 temperatures = 177°C
(350°F)
Gear pump temperature = 177°C (350°F)
PSA transfer tube temperature = 177°C (350°F)
5 Carrier extruder, Zone 1 temperature = 138°C
(280°F)
Carrier extruder, Zone 2 temperature = 216°C
(420°F)
Carrier extruder, Zone 3 temperature = 232°C
10 (450°F)
Carrier transfer tube temperature = 232°C (450°F)
Bonnot speed setting = 2.8
PSA extruder screw speed = 13 RPM
Gear pump speed = 19 RPM
15 Carrier extruder screw speed = 18 RPM

The web handling apparatus for Example 2 was the same as Example 1, except the web speed was 5.48 meters per minute (18 FPM).

20 The finished tape in Example 2 is described below. The acrylate pressure-sensitive adhesive was prepared according to the disclosures of U.S. Patent 4,833,179:

Faceside Adhesive Composition-

25 Acrylate pressure-sensitive adhesive
Carrier Composition-

Polypropylene Exxon Escorene™ 3014 (12 MFR)

Backside Adhesive Composition-

30 Acrylate pressure sensitive adhesive
Backside Adhesive Thickness - 0.038 mm (1.5 mils)
Carrier Thickness - 0.025 mm (1.0 mil)
Faceside Adhesive Thickness- 0.038 mm (1.5 mils)
Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

35

The finished tape in Example 2 had the following properties:

- 24 -

- 180 degree Peel Adhesion to SS, faceside -
0.85 N/mm (39 oz per half inch)
180 degree Peel Adhesion to SS, backside -
0.72 N/mm (34 oz per half inch)
5 180 degree Peel Adhesion to PP, faceside -
0.66 N/mm (30 oz per half inch)
180 degree Adhesion to PP, backside -
0.55 N/mm (25 oz per half inch)
Liner Release - 0.59 grams force/mm
10 Room Temp. Shear, faceside, 1000 grams - 1500
minutes
Room Temp. Shear, backside, 1000 grams - 1500
minutes
Oven Shear, 70°C (158°F), 500 grams - 500 minutes

15

Example 3

- The extrusion and web handling apparatus and conditions employed in this example were the same employed in Example 1, except the web speed was
20 increased to 24 meters per minute (80 FPM) to manufacture a 0.051 mm (2 mil) thick tape with a thin carrier layer.

The finished tape in Example 3 is described below:

- 25 Faceside Adhesive Composition-
Acrylate pressure-sensitive adhesive
Carrier Composition-
Polypropylene Exxon Escorene™ 3014 (12 MFR)
Backside Adhesive Composition-
30 Acrylate pressure-sensitive adhesive
Faceside Adhesive Thickness - 0.019 mm (0.75
mils)
Carrier Thickness - 0.013 mm (0.5 mils)
Faceside Adhesive Thickness- 0.019 mm (0.75 mils)
35 Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

- 25 -

The finished tape had the following properties:

- 180 degree Peel Adhesion to SS, faceside -
0.64 N/mm (29 oz per half inch)
- 180 degree Peel Adhesion to SS, backside -
5 0.55 N/mm (25 oz per half inch)
- 180 degree Peel Adhesion to PP, faceside -
0.54 n/mm (24 oz per half inch)
- 180 degree Peel Adhesion to PP, backside -
0.48 N/mm (22 oz per half inch)
- 10 Liner Release - 0.39 grams force/mm
- Room Temp. Shear, faceside, 1000 grams - 190
minutes
- Room Temp. Shear, backside, 1000 grams - 250
minutes
- 15 Oven Shear, 70°C (158°F), 500 grams - 15 minutes

Example 4

This example demonstrates a hand tearable tape. The polypropylene backing in this tape was highly
20 embrittled due to the crystalline morphology possible from the ultra-slow cooling rate of the center carrier layer which was blanketed in the multilayer melt by hot adhesive outer layers. The blanketing effect, provided by coextrusion, combined with specific extrusion and
25 web handling parameters, produced a tape which hand tore. Such a tape could not be easily fabricated by a traditional method, but was possible by this invention because the carrier layer was processed as part of the composite.

30 Using the same extrusion apparatus and web handling apparatus as in Example 1, hand tearable tapes were possible using a pure polypropylene homopolymer because the web path design allowed the blanketed tape to slow cool. In addition, by delaying the adhesive
35 side contact until the web had undergone initial cooling, adhesive texturing was minimized.

- 26 -

The above extrusion apparatus was operated at the following temperatures and speeds:

- Die temperature, Zone 1 = 166°C (330°F)
- Die temperature, Zone 2 = 166°C (330°F)
- 5 Feedblock temperature, Zone 1 = 171°C (340°F)
- Feedblock temperature, Zone 2 = 171°C (340°F)
- PSA extruder, Zone 3-7 temperatures = 166°C (330°F)
- Gear pump temperature = 166°C (330°F)
- 10 PSA transfer Tube temperature = 166°C (330°F)
- Carrier extruder, Zone 1 temperature = 138°C (280°F)
- Carrier extruder, Zone 2 temperature = 209°C (408°F)
- 15 Carrier extruder, Zone 3 temperature = 277°C (530°F)
- Carrier transfer tube temperature = 277°C (530°F)
- Bonnot speed setting = 1
- PSA extruder screw speed = 10 RPM
- 20 Gear pump speed = 6 RPM
- Carrier extruder screw speed = 6 RPM

The web handling apparatus was operated at the following temperatures and speeds:

- 25 Roll A temperature = 104.4°C (220°F)
- Roll B temperature = 37.7°C (100°F)
- Web line speed = 2.65 meters per minute (8.7 FPM)

The finished tape, which utilized the same adhesive as used in Example 1, is described below:

- 30 Faceside Adhesive Composition-
 - Acrylate pressure-sensitive adhesive
 - Carrier Composition-
 - Polypropylene Exxon Escorene™ 3014 (12 MFR)
 - Backside Adhesive Composition-
- 35 Acrylate pressure-sensitive adhesive
 - Faceside Adhesive Thickness - 0.038 mm (1.5 mils)
 - Carrier Thickness - 0.025 mm (1.0 mil)

- 27 -

Backside Adhesive Thickness- 0.038 mm (1.5 mils)
Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

5 The finished tape exhibited 11% elongation at
break. A length of the tape on the liner was removed
from a 2.54 cm (1 in.) wide roll of the tape. It was
hand torn across the web and exhibited smooth and
uniform hand tearability.

10

Example 5

 This example demonstrates another hand
tearable tape. A polypropylene based blend was used
for the carrier. The same process conditions were
15 employed as in Example 4.

 The finished tape, which employed the same
adhesive as used in Example 1, is described below:

Faceside Adhesive Composition-

 Acrylate pressure -sensitive adhesive

20 Carrier Composition-

 66% Polypropylene Exxon Escorene™ 3014,
 2% Ethylene Vinyl Acetate DuPont Elvax™ 3190,
 30% Polymethylmethacrylate Rohm and Haas
 VM100,

25 2% Blue color concentrate Polypropylene
 masterbatch, (available from C.B.
 Edwards, Minneapolis, MN).

Backside Adhesive Composition-

 Acrylate pressure-sensitive adhesive

30 Faceside Adhesive Thickness - 0.038 mm (1.5 mils)
 Carrier Thickness - 0.025 mm (1.0 mil)
 Backside Adhesive Thickness- 0.038 mm (1.5 mils)
 Liner - Silicone coated paper, 60# (0.098 kg/m²)
 basis weight

35

 The finished tape exhibited 5% elongation at
break. A length of the tape on the liner was removed

Example 6

The extrusion apparatus was operated at the following temperatures and speeds:

- 35

The web handling apparatus was operated at the following conditions:

- 29 -

Roll A temperature = 38°C (100°F)

Roll B temperature = 38°C (100°F)

Web line speed = 9.8 meters per minute (32 FPM)

5 The finished tape is described below:

 Faceside Adhesive Composition-

 Kraton™/Wingtack™

 Carrier Composition-

 Polypropylene Exxon Escorene™ 3085 (35MFR)

10 Backside Adhesive Composition-

 Kraton™/Wingtack™

 Faceside Adhesive Thickness - 0.081 mm (3.25
mils)

 Carrier Thickness - 0.051 mm (2.0 mils)

15 Backside Adhesive Thickness- 0.081 mm (3.25 mils)

 Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

 The finished tape had the following
20 properties:

 180 degree Adhesion to Steel -

 1.66 N/mm (76 oz per half inch)

 180 degree Adhesion to PP -

 1.64 N/mm (75 oz per half inch)

25 Liner Release - 1.8 grams force/mm

 Room Temp. Shear, 1000 grams - 10,000 minutes

 Oven Shear, 70°C (158°F), 500 grams - 6000 minutes

Example 7

30 This example is similar to Example 6, with
the following exceptions. A 66 cm (26 inch) wide
single manifold die, manufactured by the Cloeren
Company (Orange, TX), was used. This die has three
independently controlled temperature zones across its
35 width. A 5.08 cm (2 inch) diameter single screw
extruder (available from Killion Extruders, Inc., Cedar
Grove, NJ) was used to process the carrier layer. The

- 30 -

vanes in the Cloeren feedblock were adjusted to provide a differential layer thickness between the two opposed outer adhesive layers.

The extrusion apparatus was operated at the following temperatures and speeds:

Die temperature, Zone 1 = 182°C (360°F)
Die temperature, Zone 2 = 182°C (360°F)
Die temperature, Zone 3 = 182°C (360°F)
Feedblock temperature, Zone 1 = 182°C (360°F)
10 Feedblock temperature, Zone 2 = 182°C (360°F)
Drum Unloader platen temperature = 182°C (360°F)
Drum Unloader hose temperature = 182°C (360°F)
Carrier extruder, Zone 1 temperature = 138°C
(280°F)
15 Carrier extruder, Zone 2 temperature = 193°C
(380°F)
Carrier extruder, Zone 3 temperature = 227°C
(440°F)
Carrier extruder, Zone 4 temperature = 227°C
20 (440°F)
Carrier transfer tube temperature = 227°C (440°F)
Drum Unloader pump speed = 32 RPM
Carrier extruder screw speed = 25 RPM

25 The web handling apparatus was operated at the following conditions:

Roll A temperature = 18°C (65°F)
Roll B temperature = 18°C (65°F)
Web line speed = 15.2 meters per minute (50 FPM)

30

The finished tape is described below:

Faceside Adhesive Composition-

Kraton™/Wingtack™

Carrier Composition-

35 Polypropylene/Polyethylene Copolymer,
Shell Chemical Company DS 7CO4N

- 31 -

Backside Adhesive Composition-

Kraton™/Wingtack™

Faceside Adhesive Thickness - 0.056 mm (2.2 mils)

Carrier Thickness - 0.020 mm (0.8 mils)

5 Backside Adhesive Thickness- 0.020 mm (0.8 mils)

Liner - Silicone coated paper, 78# (0.127 kg/m²)

basis weight

Example 8

10 This example used the same extrusion apparatus and web handling apparatus as employed in Example 7. The flow rate of the carrier layer extruder was significantly reduced relative to the adhesive flow rate to make a tape which had a carrier less than 0.005
15 mm (0.2 mils) thick. This example, which would be difficult to fabricate by conventional methods, was possible with the present invention because the carrier layer is always processed as part of the greater composite.

20 This example also used the blanketing effect of the adhesive layers to make a low modulus tape which broke cleanly from the liner when stressed. The tape of this example is useful in commercial and industrial adhesive transfer tape applicators.

25 The extrusion apparatus was operated at the following temperatures and speeds:

Die temperature, Zone 1 = 182°C (360°F)

Die temperature, Zone 2 = 182°C (360°F)

Die temperature, Zone 3 = 182°C (360°F)

30 Feedblock temperature, Zone 1 = 182°C (360°F)

Feedblock temperature, Zone 2 = 182°C (360°F)

Drum Unloader platen temperature = 182°C (360°F)

Drum Unloader hose temperature = 182°C (360°F)

Carrier extruder, Zone 1 temperature = 138°C
35 (280°F)Carrier extruder, Zone 2 temperature = 193°C
(380°F)

- 32 -

Carrier extruder, Zone 3 temperature = 227°C
(440°F)

Carrier extruder, Zone 4 temperature = 227°C
(440°F)

- 5 Carrier transfer tube temperature = 227°C (440°F)
Drum Unloader pump speed = 40 RPM
Carrier extruder screw speed = 6 RPM

The web handling apparatus was operated at
10 the following conditions:

Roll A temperature = 104°C (220°F)

Roll B temperature = 18°C (65°F)

Web line speed = 24.4 meters per minute (80 FPM)

- 15 The finished tape is described below:

Faceside Adhesive Composition-

Kraton™/Wingtack™

Carrier Composition-

Polypropylene/Polyethylene Copolymer,

- 20 Shell Chemical Company DS 7CO4N

Backside Adhesive Composition-

Kraton™/Wingtack™

Faceside Adhesive Thickness - 0.024 mm (.95 mils)

Carrier Thickness - 0.003 mm (0.12 mils)

- 25 Backside Adhesive Thickness- 0.024 mm (0.95 mils)

Liner - Silicone coated paper, 42# (0.065 kg/m²)

basis weight

Example 9

- 30 This example is similar to Example 6 except
that the drum unloader that remelted the precompounded
synthetic rubber adhesive was fitted to a twin-screw
compounding extruder (available from American Leistritz
Extruder Corp., Somerville, NJ), which was in turn
35 fitted to the feedblock. This allowed two solids to be
dry fed and mixed into the adhesive formulation. These
solids were flame retardant compounds. The vanes in the

- 33 -

Cloeren feedblock were adjusted to provide a differential layer thickness between the two opposed outer adhesive layers.

The extrusion apparatus was operated at the following temperatures and speeds:

Die temperature, Zone 1 = 160°C (320°F)
Die temperature, Zone 2 = 160°C (320°F)
Feedblock temperature, Zone 1 = 177°C (350°F)
Feedblock temperature, Zone 2 = 177°C (350°F)
10 Drum Unloader platen temperature = 160°C (320°F)
Drum Unloader hose temperature = 160°C (320°F)
Carrier extruder, Zone 1 temperature = 149°C (300°F)
Carrier extruder, Zone 2 temperature = 177°C (350°F)
15 Carrier extruder, Zone 3 temperature = 232°C (450°F)
Carrier transfer tube temperature = 232°C (450°F)
Compounder, Zone 1 temperature = 121°C (250°F)
20 Compounder, Zone 2 temperature = 132°C (270°F)
Compounder, Zone 3 temperature = 149°C (300°F)
Compounder, Zone 4 temperature = 160°C (320°F)
Compounder transfer tube temperature = 160°C (320°F)
25 Drum Unloader pump speed = 14 RPM
Carrier extruder screw speed = 9 RPM
Compounder screw speed = 99 RPM

The web handling apparatus was operated at the following conditions:

Roll A temperature = 38°C (100°F)
Roll B temperature = 38°C (100°F)
Web line speed = 7.3 meters per minute (24 FPM)

The finished tape is described below:

Faceside Adhesive Composition-

85 weight % Kraton™/Wingtack™,

- 34 -

15 weight % flame retardant additives.

(3 parts decabromodiphenyl oxide/1 part
antimony trioxide)

Carrier Composition -

5 Polypropylene Exxon Escorene™ 3085

Backside Adhesive Composition-

85 weight % Kraton™/Wingtack™

15 weight % flame retardant additives

10 (3 parts decabromodiphenyl oxide/1 part
antimony trioxide)

Faceside Adhesive Thickness - 0.076 mm (3 mils)

Carrier Thickness - 0.038 mm (1.5 mils)

Backside Adhesive Thickness- 0.038 mm (1.5 mils)

15 Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

The finished tape had the following
properties:

20 90 degree Adhesion to SS -
1.66 N/mm (32 oz per half inch)
90 degree Adhesion to PP -
1.64 N/mm (35 oz per half inch)
Room Temp. Shear, 1500 grams - 10,000 minutes
Oven Shear, 70°C, 500 grams - 1795 minutes
25 FAR25.853 Vertical Burn, Length - 14 cm (5.5 in.)
FAR25.853 Vertical Burn, Time to Extinguish -
0 seconds

Example 10

30 To demonstrate a tougher tape construction,
the extrusion and web handling apparatus in Example 6
were used at the conditions listed below to process a
tape with a relatively thick carrier layer of linear
low density polyethylene.

35 The extrusion apparatus was operated at the
following temperatures and speeds:

- 35 -

Die temperature, Zone 1 = 176°C (350°F)

Die temperature, Zone 2 = 176°C (350°F)

Feedblock temperature, Zone 1 = 193°C (380°F)

Feedblock temperature, Zone 2 = 193°C (380°F)

5 Drum Unloader platen temperature = 171°C (340°F)

Drum Unloader hose temperature = 166°C (330°F)

Carrier extruder, Zone 1 temperature = 149°C
(300°F)

10 Carrier extruder, Zone 2 temperature = 177°C
(350°F)

Carrier extruder, Zone 3 temperature = 221°C
(430°F)

Carrier transfer tube temperature = 221°C (430°F)

Drum Unloader pump speed = 40 RPM

15 Carrier extruder screw speed = 41 RPM

The web handling apparatus was operated at
the following conditions:

Roll A temperature = 49°C (120°F)

Roll B temperature = 24°C (75°F)

20 Web line speed = 4.9 meters per minute (16 FPM)

The finished tape is described below:

Faceside Adhesive Composition-

Kraton™/Wingtack™

25 Carrier Composition-

Linear Low Density Polyethylene, Dow Dowlex™
3085

Backside Adhesive Composition-

Kraton™/Wingtack™

30 Faceside Adhesive Thickness - 0.030 mm (1.2 mils)

Carrier Thickness - 0.122 mm (4.8 mils)

Backside Adhesive Thickness- 0.030 mm (1.2 mils)

Liner - Silicone coated paper, 60# (0.098 kg/mn²)
basis weight

35 Mechanical Characteristics - tough, stretchy.

- 36 -

Example 11

This example demonstrates a coextruded, two-sided pressure sensitive adhesive tape which has a foamed thermoplastic backing layer. The backing layer was foamed using a chemical blowing agent, although other mechanical or physical blowing agents could be used.

Foamed backings bring several benefits, including:

- 1) High loft tapes - important to some applications, like adhering carpets to floors.
- 2) Reduced density - for weight sensitive applications.
- 3) Specific mechanical properties - foams have unique compressive, vibration, and load recovery properties.

This example used the general extrusion and web handling apparatus used in Example 6, except a 25.4 cm (10 in.) wide single manifold die with a shortened final land length was substituted for the conventional manifold die (available from Extrusion Dies, Inc., Chippewa Falls, WI). This die did not have a secondary manifold. To incorporate the chemical blowing agent into the carrier layer extruder, the components were dry blended in a batch mode and transferred to the extruder hopper. The chemical blowing agent used in this example was Safoam™ FP (available from Reedy International Corp., NJ). This chemical blowing agent degrades to carbon dioxide and nitrogen during the extrusion process, and as the carrier layer exits the die into an ambient atmospheric pressure, the gasses expand to form the cells of the foam.

The extrusion apparatus was operated at the following temperatures and speeds:

- Die temperature, Zone 1 = 160°C (320°F)
- Die temperature, Zone 2 = 160°C (320°F)
- Feedblock temperature, Zone 1 = 177°C (350°F)
- Feedblock temperature, Zone 2 = 177°C (350°F)
- Drum Unloader platen temperature = 160°C (320°F)

- 37 -

Drum Unloader hose temperature = 160°C (320°F)
Carrier extruder, Zone 1 temperature = 149°C
(300°F)
Carrier extruder, Zone 2 temperature = 204°C
5 (400°F)
Carrier extruder, Zone 3 temperature = 232°C
(450°F)
Carrier transfer tube temperature = 215°C (420°F)
Drum Unloader pump speed = 20 RPM
10 Carrier extruder screw speed = 42 RPM

The web handling apparatus was operated at the following conditions:

Roll A temperature = 66°C (150°F)
15 Roll B temperature = 66°C (150°F)
Web line speed = 5.2 meters per minute (17 FPM)

The finished tape is described below:

Faceside Adhesive Composition-
20 Kraton™/Wingtack™
Carrier Composition-
99.5 Weight % Low Density Polyethylene,
Eastman Tenite™ 1550P,
0.5 Weight % Reedy Safoam™ FP (activated).
25 Backside Adhesive Composition-
Kraton™/Wingtack™
Faceside Adhesive Thickness - 0.102 mm (4 mils)
Carrier Thickness - 0.330 mm (13 mils)
Backside Adhesive Thickness- 0.051 mm (2 mils)
30 Liner - Silicone coated paper, 60# (0.098 kg/m²)
basis weight

Example 12

In this example, a 45.72 cm (18 in.) wide
35 three manifold "Vane" die was used (available from
Cloeren Company, Orange, TX). This die was modified to
hold an insert in the pathway of the carrier material

- 38 -

and split the stream of the carrier material into a predetermined number of individual streams. these streams provided continuous machine direction (i.e., down web) strands of the carrier material. These
5 strands were separated from one another by adhesive in the cross-web direction at a spacing defined by the geometry of the insert. The adhesive covered the fibers on the opposed surfaces of the extrudate.

Because of relatively thin adhesive layers
10 directly over the carrier domains, compared to the adhesive mass between the domains, a greatly differing adhesion of the tape to a substrate can be achieved by varying the force of application. A high normal force deforms the strands, exposing the substrate to the
15 adhesive mass between the strands.

This example exhibits extreme anisotropy in tensile properties, tear resistance, adhesion, and shear.

The extruders and web handling apparatus used
20 with this die were similar those employed in Example 6.

The extrusion apparatus was operated at the following temperatures and speeds:

Die temperature, Zone 1 = 182°C (360°F)
Die temperature, Zone 2 = 182°C (360°F)
25 Drum Unloader platen temperature = 160°C (320°F)
Drum Unloader hose temperature = 160°C (320°F)
Carrier extruder, Zone 1 temperature = 138°C (280°F)
Carrier extruder, Zone 2 temperature = 193°C
30 (380°F)
Carrier extruder, Zone 3 temperature = 210°C (410°F)
Carrier transfer tube temperature = 204°C (400°F)
Drum Unloader pump speed = 50 RPM
35 Carrier extruder screw speed = 7.3 RPM

The web handling apparatus was operated at the following conditions:

- 39 -

Roll A temperature = 38°C (100°F)

Roll B temperature = 16°C (60°F)

Web line speed = 5.48 meters per minute (18 FPM)

5 The finished tape is described below:

Faceside Adhesive Composition-

Kraton™/Wingtack™

Carrier Composition-

Polypropylene Exxon Escorene™ 3085 (35MFR)

10 Backside Adhesive Composition-

Kraton™/Wingtack™

Nominal Total Thickness - 0.102 mm (4.0 mils)

Carrier Domain Diameters - 0.081 mm (3.25 mils)

Liner - Silicone coated paper, 60# (0.098 kg/m²)

15 basis weight

The tape had approximately 6 strands per 2.54 cm
(in.) width.

20

Claims

1. A composite tape (10) having two exterior surfaces (12, 14) of a normally tacky pressure-sensitive adhesive comprising a unified structure of
5 first and second simultaneously melt processed pressure-sensitive adhesive layers (16, 18).
2. A composite tape according to claim 1 wherein said adhesive layers are essentially
10 permanently joined in said unified structure.
3. A composite tape according to claim 1 wherein said layers are coextruded.
- 15 4. A composite tape according to claim 1 further comprising at least a third layer (19) simultaneously melt processed between said first and second pressure-sensitive adhesive layers wherein said structure is cooled before passing through a nip.
20
5. A composite tape according to claim 4 wherein said third layer is an adhesive layer.
6. A composite tape according to claim 4
25 wherein said third layer is a non-adhesive layer.
7. A composite tape according to claim 1 wherein the ratio of the melt viscosity of the simultaneously melt processed layers is in a range of
30 from 10:1 to 1:10.
8. A composite tape (10) comprising first and second normally tacky pressure sensitive adhesive layers (16, 18) and a thin carrier layer (19) between
35 said first and second pressure-sensitive adhesive layers, wherein all of said layers are simultaneously melt processed to form a unified structure.

- 41 -

9. A composite tape according to claim 8 wherein the individual layers of said structure are essentially inseparable therefrom.

5 10. A composite tape according to claim 8 further comprising an intermediate layer (11, 13) between said carrier layer and at least one of said pressure-sensitive adhesive layers.

10 11. A composite tape according to claim 8 wherein said carrier layer is discontinuous.

 12. A composite tape according to claim 11 wherein said carrier layer comprises at least one rib
15 disposed longitudinally therein.

 13. A composite tape according to claim 8 wherein said carrier layer is a foamed material.

20 14. An oriented composite tape according to claim 1.

 15. Method for the manufacture of pressure-sensitive adhesive tape (10) by melt processing
25 comprising the steps of:

- a) providing at least two molten streams (102, 112) of a first and second pressure-sensitive adhesive composition;
- 30 b) combining said streams into a single unified, molten structure having said first and second adhesive compositions on first and second outer surfaces thereof;
- 35 c) depositing said unified, molten structure onto a solid substrate (150) so that said first surface is contacted

- 42 -

to said substrate and said surface a
free surface, and

d) cooling said molten structure.

5 16. Method according to claim 15 wherein
step d) includes contacting said solid substrate to a
surface maintained at a temperature less than the melt
temperature of any of said molten streams.

10 17. Method according to claim 15 comprising
the further step:

15 aa) providing a molten stream (122) of a
third extrudable material which is
combined in said unified structure of
step b) between said first and second
pressure-sensitive adhesive
compositions.

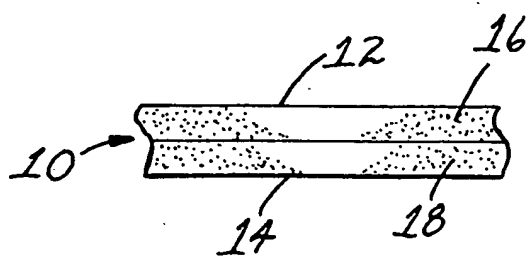
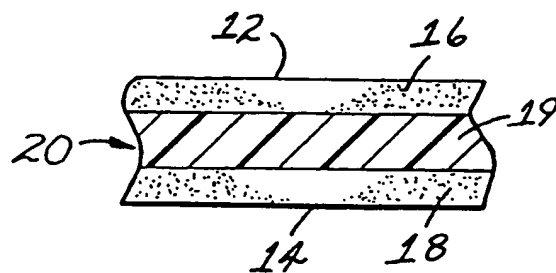
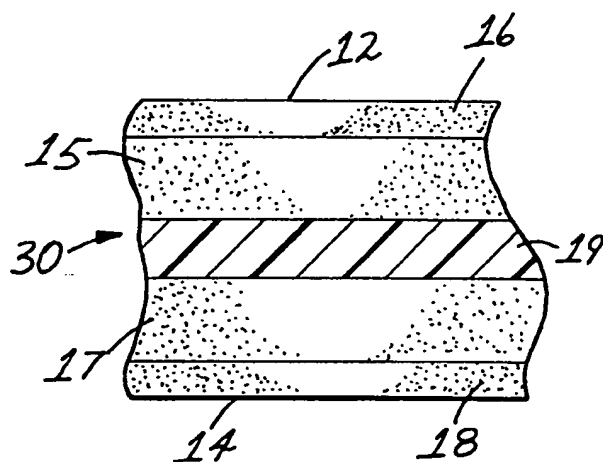
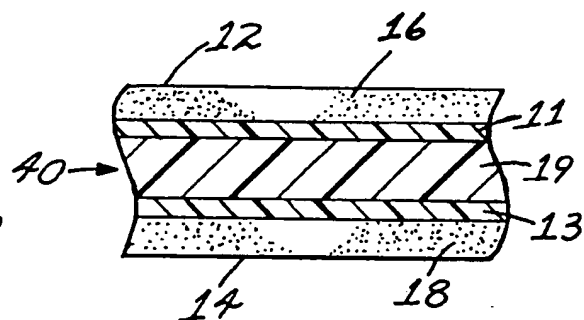
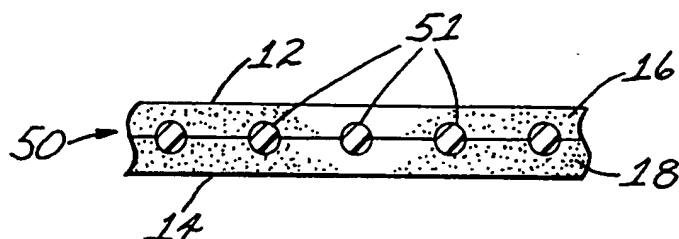
20 18. Method according to claim 15 wherein
said first and second pressure-sensitive adhesive
compositions exhibit different room temperature tack
when solidified.

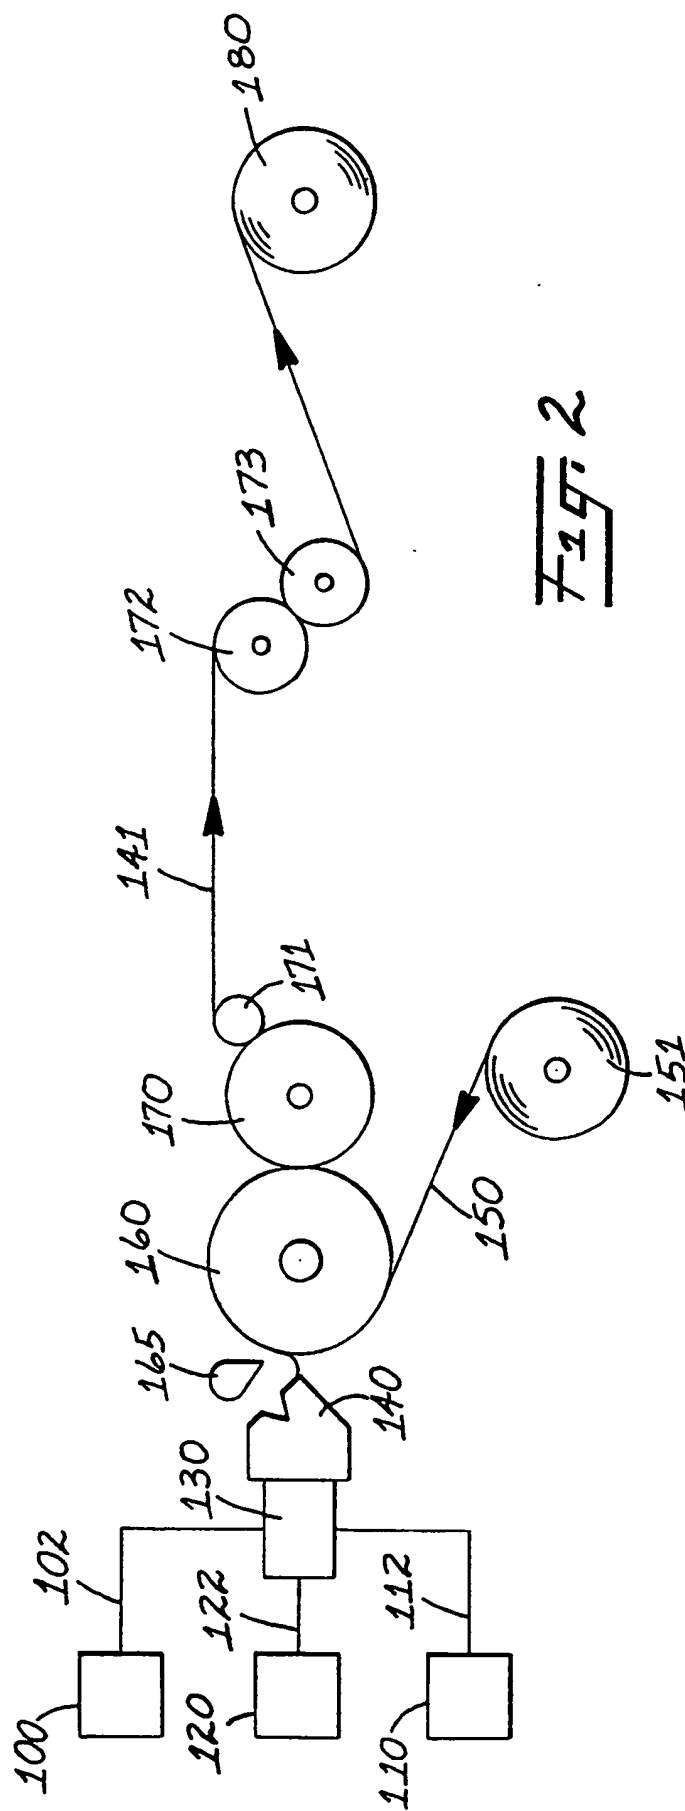
25 19. Method according to claim 17 wherein
said molten structure is cured rapidly so as to render
said layer of extrudable material ductile.


30 20. Method according to claim 17 wherein
said molten structure is cured slowly so as to render
said layer of extrudable material crystalline.

 21. Method according to claim 15 comprising
the further step of orienting said tape.

35 22. Method according to claim 15 comprising
the further step of crosslinking said adhesive.

Fig. 1AFig. 1BFig. 1CFig. 1DFig. 1E

Fig. 2

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 C09J7/02 // B29C 47/06		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	C09J	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
P,X	Week 9235, Derwent Publications Ltd., London, GB; AN 92-289023 & JP,A,4 198 289 (SEKISUI CHEM IND CO LTD) 17 July 1992 see abstract	1,3,4,6
A	US,A,4 379 806 (RALF KORPMAN) 12 April 1983 cited in the application	1,15
A	FR,A,2 600 981 (PAPETERIES ELCE) 8 January 1988	1,15
A	EP,A,0 325 007 (ACUMETER LABORATORIES INC.) 26 July 1989	
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
16 DECEMBER 1992	29. 12. 92	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	GIRARD Y.A. 	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. US 9207277
SA 64405**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 16/12/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4379806	12-04-83	None	
FR-A-2600981	08-01-88	None	
EP-A-0325007	26-07-89	US-A- 4725468	16-02-88

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.